


## SS1203 Battery Mounting Hardware for Hydraulic Hoists

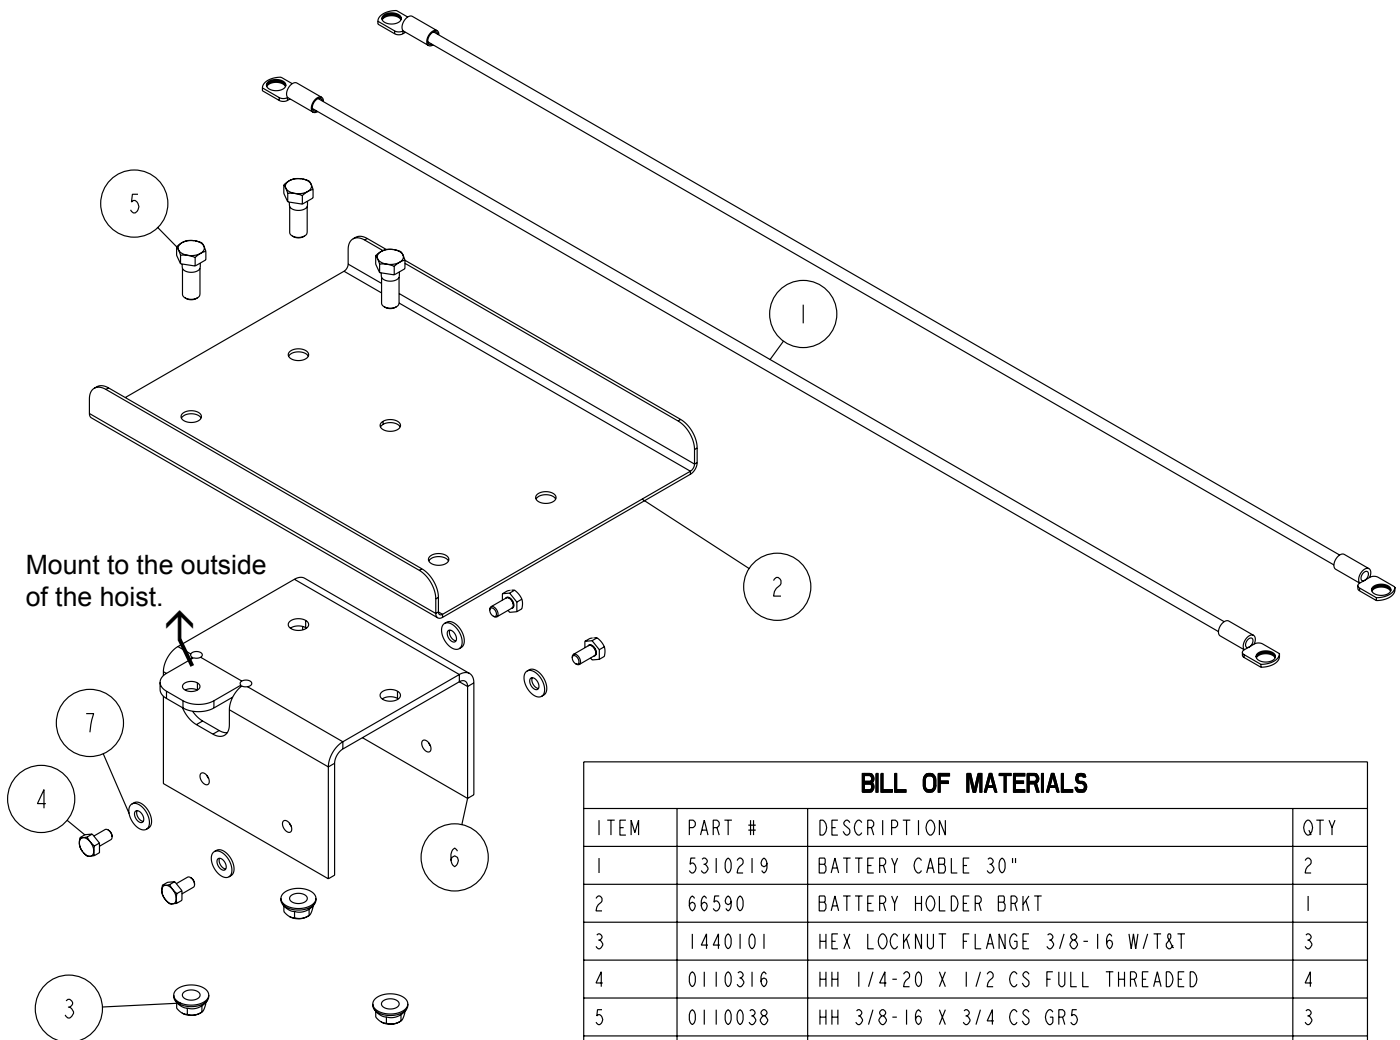

### BILL OF MATERIALS

ITEM	PART #	DESCRIPTION	QTY
1	5310219	BATTERY CABLE 30"	2
2	66590	BATTERY HOLDER BRKT	1
3	1440101	HEX LOCKNUT FLANGE 3/8-16 W/T&T	3
4	0110316	HH 1/4-20 X 1/2 CS FULL THREADED	4
5	0110038	HH 3/8-16 X 3/4 CS GR5	3
6	68863	MOTOR MOUNT BRKT	1
7	1310070	WASHER USS FLAT 1/4	4

### Assembly Instructions:

Position the battery holder bracket above the motor mount bracket as shown. Align the three holes in the two parts, then place three – 3/8" x 3/4" hex bolts down through the holes. Place a 3/8" flange nut on each bolt on the bottom side as shown. Tighten.

Place the assembly on the lift tube of the hydraulic hoist so that the holes in the mounting bracket align with the pre-drilled and pre-tapped holes in the lift tube. Locate a 1/4" flat washer and place it on one of the 1/4" x 1/2" hex bolts. Thread it into the hole in the lift tub. Repeat on the remaining bolts. Tighten to secure in place.

Use the longer battery cables supplied in the kit to connect the battery to the motor.

Assembly is complete.